


The zLock™ line of universally deployable double-sided locking power cords provides users with a stand-alone locking power cord solution which offers the ability to pair with existing infrastructure. Simply replace your existing power cords with zLock™ locking power cords to secure the power path all the way to devices in the server rack. Switch to zLock™ locking power cords to eliminate any accidental, nuisance or vibration disconnects.


Key Features:

- zLock™ is a plug and play replacement for existing power cords.
- Requires no proprietary mating plug or receptacle on either side of the connection.
- Perfect for deployment in seismically active locations.
- Locking C13, C14, C15, C19 and C20 connectors are now available.
- NEMA connectors to locking C13, C15 and C19 models allow for single-sided locking options. Medical grade models are also available.
- Available in standard Data Center lengths from 2 feet (0.6m) to 10 feet (3m).
- Custom lengths, colors and connector combinations are available upon request.
- Includes an attached serial barcode label for easy scanning into inventory or system mapping.
- UL listed (UL 817), Au and Nz Listed (ULL-100584-EA), and CE compliant (IEC 60320) .

Zlock C14 Inlet (Plug)



Stock Configurations:

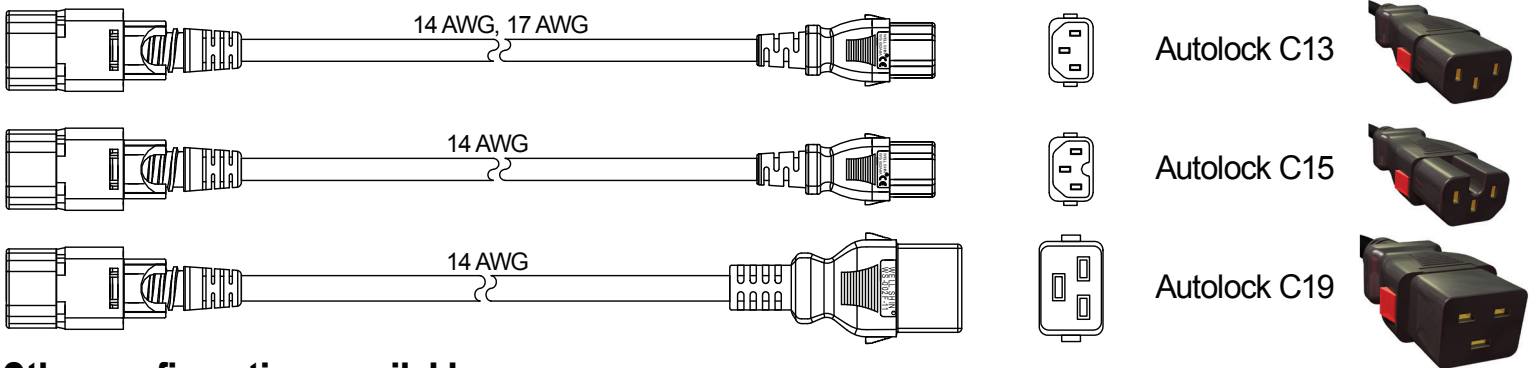

Other configurations available.

PART NUMBERING

zLock™ — zC14 — 17		aC13		1m		RD	
PRODUCT	PLUG TYPE	GAUGE	(CORD DETAILS)	RECEPTACLE TYPE	(APPLICATION:)	LENGTH	COLOR
zLock™	zC14 - Locking C14	17 - 17 AWG: UL E90165 Type SGT - 105°C	300V - 3 X 1.04mm ² Copper	aC13 - Locking C13	North America:	0.6 - 0.6m (2')	(None) Black GY Grey WH White YL Yellow OR Orange RD Red GR Green BL Blue
		14 - 14 AWG: UL E90165 Type SGT - 105°C		300V - 3 X 2.08mm ² Copper	aC15 - Locking C15		
				aC19 - Locking C19	12A - 125/ 250V	1.2m - 1.2m (4'-3.2")	
					15A - 125/ 250V	1.5m - 1.5m (4'-9.5")	
						2m - 2m (6'-7")	
						2.5m - 2.5m (8'-1")	
						3m - 3m (10')	